

Antineutrino monitoring of spent nuclear fuel

Vedran Brdar,^{1,*} Patrick Huber,^{2,†} and Joachim Kopp^{1,‡}

¹*PRISMA Cluster of Excellence & Mainz Institute for Theoretical Physics,
Johannes Gutenberg University, Staudingerweg 7, 55099 Mainz, Germany*

²*Center for Neutrino Physics, Virginia Tech, Blacksburg 24061, USA*

(Dated: June 22, 2016)

Military and civilian applications of nuclear energy have left a significant amount of spent nuclear fuel over the past 70 years. Currently, in many countries world wide, the use of nuclear energy is on the rise. Therefore, the management of highly radioactive nuclear waste is a pressing issue. In this letter, we explore antineutrino detectors as a tool for monitoring and safeguarding nuclear waste material. We compute the flux and spectrum of antineutrinos emitted by spent nuclear fuel elements as a function of time, and we illustrate the usefulness of antineutrino detectors in several benchmark scenarios. In particular, we demonstrate how a measurement of the antineutrino flux can help to re-verify the contents of a dry storage cask in case the monitoring chain by conventional means gets disrupted. We then comment on the usefulness of antineutrino detectors at long-term storage facilities such as Yucca mountain. Finally, we put forward antineutrino detection as a tool in locating underground “hot spots” in contaminated areas such as the Hanford site in Washington state.

With carbon dioxide induced climate change and the scarceness of fossil fuels becoming imminent problems for humanity, nuclear energy is undergoing a renaissance in many countries. However, nuclear technology comes with a number of intrinsic problems, such as the limited availability of nuclear fuel, the danger of proliferation of special nuclear materials and eventually nuclear weapons technology, the risk of major accidents, and the management of highly radioactive nuclear waste. As a result, nuclear energy is relatively expensive compared to many other available methods of energy production.

In this letter, we will in particular focus on the waste issue: we will argue that a measurement of the antineutrino flux emitted by beta-decaying isotopes can be a unique component in a multi-faceted approach to monitoring and safeguarding nuclear waste repositories. The unique advantage of antineutrinos is that they penetrate the shielding surrounding the repository and thus offer a direct method for remotely probing the nuclear material inside. Other probes such as gamma rays or neutrons are heavily attenuated by the materials they need to traverse on the way to a detector. Therefore, relating their measured fluxes to the actual content of the repository requires a sophisticated propagation model, which in turn relies on an accurate knowledge of the contents of the repository. This cyclic dependence on information is one of the major limitations of conventional monitoring methods. On the downside, the very fact that antineutrinos are not attenuated even by a whole mountain, implies that antineutrino detection has to deal with very small cross sections $\lesssim 10^{-41} \text{ cm}^2$ [1]. Any meaningful flux measurement thus requires the deployment of a large detector with at least several tons of active material for a time period of order months.

Nevertheless, thanks to advances in detector technology, this appears feasible today at a comparatively rea-

sonable cost. In fact, practical applications of antineutrino detectors in the nuclear industry have been discussed for a long time, mostly in the context of monitoring power reactors [2–7]. Several detectors have been built to demonstrate the feasibility of such applications [8, 9], and further studies are planned in current and future experiments [10].

In the following, we will first compute the antineutrino flux and spectrum emitted by spent nuclear fuel, and then consider several scenarios in which antineutrino detectors can be used in the context of radioactive waste repositories: (i) verifying the contents of dry storage casks in above-ground facilities; (ii) monitoring a long-term underground repository remotely; (iii) aiding in the management and cleanup of historical waste repositories, for instance at the Hanford site in Washington state.

Antineutrino emission from spent nuclear fuel. Spent nuclear fuel contains two distinct types of radioactive isotopes: actinides, which are either unused fuel or decay products of other actinides or created by neutron capture; and fission fragments, which are the direct result of the fission process. For the first 1,000–10,000 years the total activity is dominated by fission fragments and nearly exclusively caused by beta decays (and the associated gamma emission). Therefore, a large number of antineutrinos is produced. However, detection by inverse beta decay, which is the focus of this letter, requires antineutrinos to have an energy of at least 1.8 MeV. The lifetime of a beta decaying nucleus scales roughly like Q^5 , where Q is the energy released in the decay. Therefore, the detectable antineutrino signal for most fission fragments decays within hours to days after fission ends. There is, however, a handful of isotopes that have a two stage decay, where the first decay has a very small Q and thus a resulting long lifetime, followed by a fast decay with $Q > 1.8 \text{ MeV}$. The most notable example is

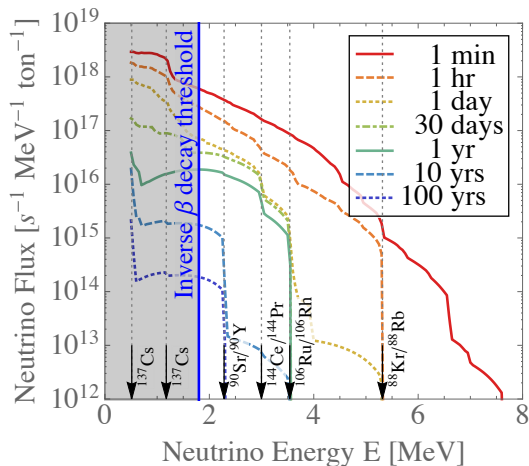


FIG. 1. The spectrum of electron antineutrinos emitted by spent nuclear fuel as a function of the time after discharge from the reactor. We also indicate in gray below the threshold for inverse beta decay, the dominant antineutrino detection process, at 1.8 MeV. The data underlying this plot is available in the supplementary material.

strontium-90, which decays with a half-life of 28.90 yrs to yttrium-90, which in turn decays within hours to the stable zirconium-90 with $Q = 2.22801$ MeV. Strontium-90 is produced in around 5% of all fission events. The isotopes with the next longest lifetimes with antineutrino emission above 1.8 MeV in their decay chains are ruthenium-106 (378.1 days) and cerium-144 (284.91 days). As a result, the detectable antineutrino emission of spent nuclear fuel after more than a few years is entirely given by strontium-90. It is worth noting that strontium-90 (like all other fission fragments) remains in the high-level waste resulting from reprocessing using the widely employed PUREX process. In fig. 1, we plot the number of electron antineutrinos emitted per second, per MeV, and per ton of spent nuclear fuel as a function of antineutrino energy. We assume a burnup¹ of 45 GW days. Different colored curves correspond to nuclear fuel elements of different age, measured in terms of the time after discharge from the nuclear reactor. As expected, we observe a softening of the spectrum over time, as short-lived isotopes with large Q values decay away and only the long-lived ones remain. Note, however, that even after 100 yrs, a non-zero flux remains above the energy threshold of 1.8 MeV for inverse beta decay $\bar{\nu}_e + p \rightarrow n + e^+$, the main detection reaction for electron antineutrinos.

Dry cask storage facilities. As long term storage facil-

ities for spent nuclear fuel are becoming available only slowly, temporary storage solutions on the premises of nuclear power stations have become a necessity. Once fuel elements have been allowed to cool in a spent fuel pool for ~ 10 yrs [11, 12] after discharge from the reactor, they are typically transferred to dry storage casks, large shielded steel cylinders several meters tall, each of them holding ~ 14 –24 tons of spent nuclear fuel elements with a uranium content of 10–17 tons [12–14]. The layout of a typical dry storage facility is shown in fig. 2. Even though a number of safety and security measures are in place to protect such facilities, manipulations are imaginable. The core of the IAEA’s (International Atomic Energy Agency’s) methodology for spent fuel is so-called continuity of knowledge (CoK): the amount and type of fuel loaded into a cask is monitored and recorded, the cask is closed and a tamper-proof seal is applied. As long as the seal is intact and the records are available, the resulting CoK allows to infer with a great deal of certainty the contents of the cask. However, even during routine operations it is conceivable that records are inaccurate or lost or that the seals on the cask are compromised. In this case the contents of the cask need to be reverified to restore the CoK.

The scenario we envision is the deployment of an antineutrino detector, with a fiducial target mass² of order ~ 20 tons, close to the storage casks for several months. Using as an example the storage facility at the Surry Nuclear Power Station in the U.S., where casks hold 9–16 metric tons of uranium (MTU), we assume that 50% of the radioactive material from two of the 15 MTU casks (colored in red in fig. 2) goes missing. This roughly corresponds to removing 3% of the total amount of nuclear waste stored at Surry. We make no claim that an actual diversion case would have any similarity to this scenario nor that this could occur as part of routine operations, it merely serves to indicate the general level of sensitivity we might expect from antineutrino monitoring.

To determine what it takes to discover such an anomaly, we simulate the expected number of detected antineutrino events as a function of the detector position for the two hypothesis “all storage casks full” (F) and “50% of nuclear material missing in two casks” (M). We use the antineutrino spectrum given by the blue dashed curve in fig. 1 (10 years after discharge) and the inverse beta decay cross sections from [1]. Neutrino oscillation effects, though small, are taken into account, with the oscillation parameters given in [15]. The rate of antineutrino events per ton of fiducial detector mass and per MTU of source mass expected from a single cask, treated

¹ Burnup is a measure of how much energy per unit mass has been extracted from nuclear fuel, it is directly proportional to the total number of fissions occurred per unit mass. As a result the strontium-90 content and thus the antineutrino emission rate are directly proportional to the burnup.

² The fiducial detector mass is the effective mass, after accounting for fiducial volume cuts and efficiency factors introduced in event reconstruction and analysis.

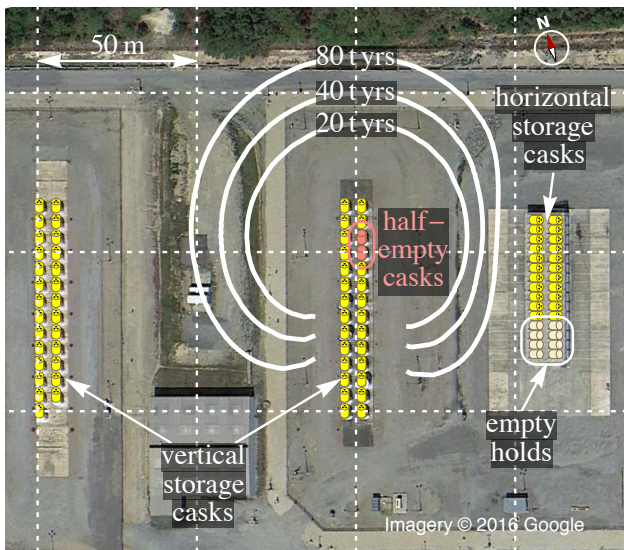


FIG. 2. The dry storage facility at the Surry Nuclear Power Plant in Virginia, USA [13]. Filled storage casks, highlighted in yellow, contain 9–16 MTU each. In the benchmark scenario discussed in the text, we assume that 50% of the spent fuel in two 15 MTU casks (marked in red) have gone missing. Colored contours indicate the exposure (in ton yrs) required to establish the loss of nuclear material at the 90% confidence level.

as a point source, is

$$N_\nu = 5.17 \text{ yr}^{-1} \text{ ton}^{-1} \text{ MTU}^{-1} \times \left(\frac{10 \text{ m}}{d} \right)^2, \quad (1)$$

where d is the distance between the source and the detector. Note that this number depends on the time after discharge and is for instance reduced by $\sim 5\%$ one year later.

The main antineutrino background to the measurement includes antineutrinos from a running reactor ~ 1 km away from the detector. Backgrounds from other power stations are smaller by a factor $\sim 10^{-4}$ and are therefore negligible. We have also checked that the background from geo-neutrinos produced in radioactive decays in the Earth's crust and mantle can be safely neglected. Events are divided into 0.2 MeV wide energy bins. Denoting the number of signal events expected under the two alternative hypotheses by F_i and M_i , and the number of background events by B_i , we define the test statistic

$$\chi^2 \equiv 2 \sum_i \left\{ F_i - M_i + (M_i + B_i) \log \left[\frac{M_i + B_i}{F_i + B_i} \right] \right\}, \quad (2)$$

which follows a χ^2 distribution.

The results of the analysis are represented by the contours in fig. 2 which indicate where the antineutrino detector should be placed in order to establish the flux deficit at the 90% confidence level with 20 ton yrs,

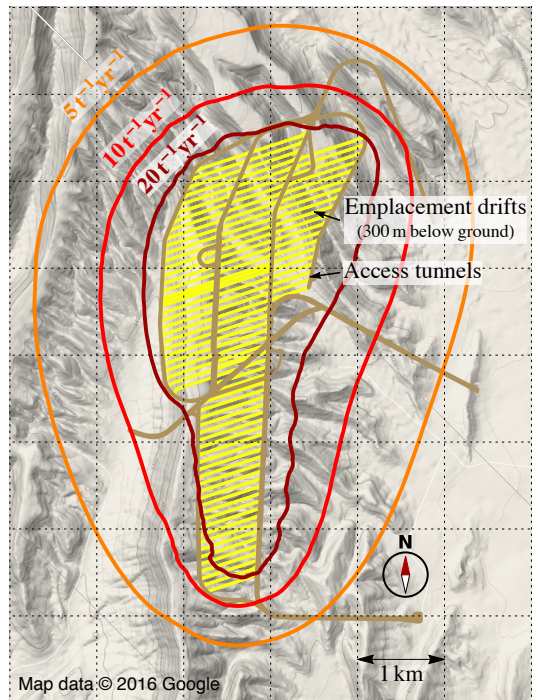


FIG. 3. The planned long term storage facility at Yucca mountain. The yellow grid indicates the drifts holding the radioactive material at a depth of 300 m below the surface, while red and orange contours show the expected antineutrino count rates for a detector at the surface.

40 ton yrs, and 80 ton yrs of exposure, respectively. We see that the detector needs to be placed within ~ 50 meters of the affected casks in order to successfully discover the assumed loss of nuclear waste within a reasonable time. Further improvement, i.e. an increase in the detector distance d , requires larger detector mass m or increasing the duration of the measurement t .

For a surface-deployed detector, we have to acknowledge that cosmic ray induced backgrounds will represent a problem for which currently no technical solution exists. However, the recent interest in sterile neutrinos has triggered a massive, global effort in detector R&D, see for instance ref. [10], which is bound to result in significantly improved cosmic ray rejection capabilities.

Application to long-term storage facilities. Above-ground storage of spent nuclear fuel, while widely used, is only a temporary solution, and the long-term goal must be to establish underground repositories that can keep radioactive material out of the biosphere for 10^4 – 10^6 years [16]. The usefulness of antineutrino detectors at such geological repositories is limited by the low antineutrino fluxes after strontium-90 has decayed away (half-life 28.8 yrs). Moreover, in order not to disturb the repository, construction of antineutrino detectors seems feasible and useful only at distances of order 100 meters or larger.

To illustrate the prospects of detecting antineutrinos

from a geological nuclear waste repository, we show in fig. 3 the signal event rates expected at the proposed Yucca mountain repository in Nevada, which would hold 70 000 MTU of radioactive material, stored ~ 300 m underground. We see that even a small detector (~ 10 tons) located at the surface would see an appreciable event rate. With a kiloton-scale instrument like KamLAND [17] or the planned JUNO experiment [18], count rates would be significantly larger, especially when such a detector is placed in an underground location closer to the repository. Even then, however, it would only be possible to detect cataclysmic disruptions of the repository. More typical (but nevertheless highly dangerous) failure scenarios that involve the leakage of only a small amount of nuclear material into the surrounding soil would not be detectable. This may change, however, once detector technology with better directional sensitivity becomes available (see below).

Leakage of nuclear material at the Hanford site. Sometimes, nuclear oversight agencies are faced with the challenge to secure or decommission a nuclear waste repository in which the contents, and perhaps even the underground location, of storage casks are not known. An example is the Hanford site in the state of Washington (USA), where plutonium for military purposes was produced from 1944 to 1987. At Hanford, a major problem is the leakage of storage containers for high level nuclear waste, leading to radioactive contamination of ground water [19, 20].

Consider first a scenario where the location of storage tanks is known, but their precise content is not. We will focus on one particular array of storage tanks at Hanford, the T tank farm [19], which consists of 16 tanks, arranged in a 4×4 grid measuring ~ 120 m $\times$ 80 m and originally containing between 0.2 and 5 MTU of spent fuel each. We assume the nuclear material in the tanks was discharged from a reactor 50 years ago. With a detector placed 30 meters from the most massive (5 MTU) tank, and taking into account background antineutrinos from other storage tanks and from the Columbia nuclear power plant (30 km away, 3.5 GW thermal power), the amount of material in that tank can be measured with an uncertainty of ± 2.1 MTU for an exposure of 20 ton yrs and with an uncertainty of ± 1.1 MTU for an exposure of 80 ton yrs. The age of the nuclear material (i.e. the time after discharge) can be determined to lie between 44 yrs and 54 yrs with 80 ton yrs of exposure, assuming the true age is 50 yrs.

Assume now that a fraction of the radioactive material in the most massive tank is slowly leaking out. We model this situation by reducing the inventory of the tank and introducing a secondary point source containing the leaked material 20 meters below its original location. Detecting such leakage seems unfeasible with established detector technologies, but requires antineutrino detectors that not only measure energy, but also the direction of in-

coming antineutrinos. Such detectors are currently under discussion [21–23], with an expected angular resolution down to $\mathcal{O}(10)$ degrees [22]. Assuming the availability of such a detector, we bin events in the cosine of the zenith angle, $\cos\theta$, (5 bins) and the azimuth angle ϕ (9 bins). We use a highly simplified model of angular smearing in terms of a Gaussian with a width of 20 degrees. For simplicity, we also integrate over energy, assuming that the time of discharge and thus the antineutrino energy spectrum are known already. We estimate that by deploying a directionally sensitive 20 ton detector at a distance of 30 meters from the damaged tank, leakage of 55% of the tank’s content can be discovered at 90% CL. With an 80 ton detector, detection of 25% leakage is possible.

Radioactive spill at Hanford building 324. As a further application scenario, we consider an actual spill of radioactive material that happened in October 1986 in a radiochemical plant at Hanford known as Building 324. At the time, a large amount of strontium-90 and caesium-137, with a total activity of 1.3 MCi was released from a hot cell. Half of it leaked into the ground and is now presumed to be located within a 10 meter $\times$ 10 meter area about 2 meters below ground level [20]. In 2010, a pit was excavated ~ 20 meters from the spill to drive long steel pipes into the affected area, thus allowing the deployment of temperature and activity sensors. This method has the disadvantage that it allows moisture to enter the contaminated soil, which may ultimately allow radioactive material to seep further into the ground, possibly reaching ground water levels. For future incidents of this type, we therefore consider the deployment of antineutrino detectors for remote sensing. Modeling the spill as a point source at a depth of 2 m, and assuming the availability of an 80 ton antineutrino detector with angular sensitivity located 30 m away at the same depth, we find that a further downward shift of the nuclear material by 3.5 m is detectable at the 90% CL after one year of exposure.

Localizing nuclear waste containers. Let us now turn to a more speculative scenario where neither the exact location nor the contents of storage casks are known. This could happen, for instance, when documentation is lost and localization using other methods like ground-penetrating radar is not feasible, for instance in a scenario where many casks are buried underground, but only few contain high level nuclear waste. We envision successive or simultaneous deployment of 80 ton antineutrino detectors on a two-dimensional grid with a spacing of 250 m. We again assume angular sensitivity, but since the distance between detectors and sources is large, the zenith angle measurement is irrelevant and can be discarded. Figure 4 illustrates the outcome of such an analysis for four randomly placed storage casks of unknown content and for an exposure of 80 ton yrs per detector. Using a stochastic optimization method, we fit the positions (x_j, y_j) and activities m_j of the four sources. Colored

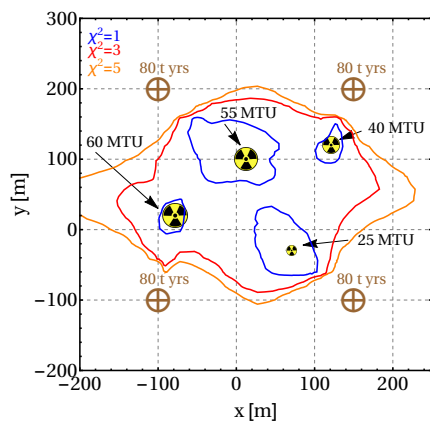


FIG. 4. Using antineutrino detectors (brown $\oplus$ symbols) to localize nuclear waste storage casks (radioactive hazard symbols). Colored contours indicate the accuracy with which casks can be localized (see text for details). We show results from a relatively coarse scan; a follow-up measurement with detectors placed only 30 m apart, the source positions can be refined to $\mathcal{O}(m)$ accuracy. We have assumed an exposure of 80 t yrs per detector, and we have used the antineutrino spectrum expected 50 years after discharge from a reactor.

contours show the dependence of the test statistic χ^2 (defined in analogy to eq. (2)) on the fit values of (x_1, y_1) , with the other (x_j, y_j) as well as all m_j allowed to float. We see that storage casks can be localized to within tens of meters. For further refinement of their position (for instance in order to guide cleanup efforts), the procedure can be repeated with detectors moved closer to the source positions determined in the initial scan. With a ~ 30 m spacing between detectors, the position of each source can be determined to $\mathcal{O}(m)$ accuracy.

Summary. We have calculated the antineutrino flux and spectrum from spent nuclear fuel, and have used these results to outline possible applications of antineutrino detectors in monitoring and managing nuclear waste repositories. We have shown that, at a dry cask storage facility like the ones used at many commercial nuclear power stations, installation of an antineutrino detector could allow oversight agencies to remotely detect leakage or theft of the stored nuclear waste. At long term geological repositories, a significant antineutrino flux is expected, but detecting realistic anomalies such as leakage of a small amount of radioactive material would require advanced detector technologies with angular sensitivity. Such detectors could also help in the decommissioning of nuclear installations like the Hanford site, where they would allow for the localization of nuclear material and for the characterization of spills.

Acknowledgments. PH thanks Fermilab for hospitality during the completion of this manuscript. This work was in part supported by the U.S. Department of Energy under contracts DE-SC0013632 and DE-SC0009973. The

work of VB and JK is supported by the German Research Foundation (DFG) under Grant Nos. KO 4820/1-1 and FOR 2239 and by the European Research Council (ERC) under the European Union’s Horizon 2020 research and innovation programme (grant agreement No. 637506, “ ν Directions”). VB is also supported by the DFG Graduate School Symmetry Breaking in Fundamental Interactions (GRK 1581).

* vbrdar@uni-mainz.de

† pahuber@vt.edu

‡ jkopp@uni-mainz.de

- [1] P. Vogel and J. F. Beacom, *The angular distribution of the neutron inverse beta decay, $\bar{\nu}_e + p \rightarrow e^+ + n$* , *Phys. Rev. D* **60** (1999) 053003, [[hep-ph/9903554](#)].
- [2] L. A. Mikaelian, *Neutrino laboratory in the atomic plant*, in *Proc. Int. Conference Neutrino-77*, pp. 383–387, 1978.
- [3] A. Bernstein, Y.-f. Wang, G. Gratta, and T. West, *Nuclear reactor safeguards and monitoring with anti-neutrino detectors*, *J. Appl. Phys.* **91** (2002) 4672, [[nucl-ex/0108001](#)].
- [4] M. M. Nieto, A. C. Hayes, C. M. Teeter, W. B. Wilson, and W. D. Stanbro, *Detection of anti-neutrinos for nonproliferation*, [nucl-th/0309018](#).
- [5] P. Huber and T. Schwetz, *Precision spectroscopy with reactor anti-neutrinos*, *Phys. Rev. D* **70** (2004) 053011, [[hep-ph/0407026](#)].
- [6] A. Bernstein, G. Baldwin, B. Boyer, M. Goodman, J. Learned, J. Lund, D. Reyna, and R. Svoboda, *Nuclear security applications of antineutrino detectors: Current capabilities and future prospects*, *Science & Global Security* **18** (2010), no. 3 127–192. available from <http://scienceandglobalsecurity.org/archive/sgs18bernstein.pdf>.
- [7] E. Christensen, P. Huber, and P. Jaffke, *Antineutrino reactor safeguards - a case study*, [arXiv:1312.1959](#).
- [8] Y. Klimov, V. Kopeikin, L. Mikalyan, K. Ozerov, and V. Sinev, *Neutrino method remote measurement of reactor power and power output*, *Atomic Energy* **76** (1994) 123–127.
- [9] N. Bowden, A. Bernstein, M. Allen, J. Brennan, M. Cunningham, et al., *Experimental results from an antineutrino detector for cooperative monitoring of nuclear reactors*, *Nucl. Instrum. Meth.* **A572** (2007) 985–998, [[physics/0612152](#)].
- [10] N. S. Bowden, K. M. Heeger, P. Huber, C. Mariani, and R. B. Vogelaar, *Applied Antineutrino Physics 2015 – Conference Summary*, [arXiv:1602.04759](#).
- [11] R. Alvarez, *Spent Nuclear Fuel Pools in the U.S.: Reducing the Deadly Risks of Storage*, tech. rep., Institute for Policy Studies, 2011. available from <http://www.ratical.org/radiation/NuclearExtinction/SpentNuclearFuelPoolsInUS.pdf>.
- [12] U. S. N. R. Commission, “Spent fuel storage in pools and dry casks: Key points and questions & answers.” <http://www.nrc.gov/waste/spent-fuel-storage/faqs.html>.
- [13] S. R. Greene, J. S. Medford, and S. A. Macy, *Storage*

- and transport cask data for used commercial nuclear fuel, 2013 u.s. edition, Tech. Rep. ATI-TR-13047, EnergX, LLC and Advanced Technology Insights, LLC, 2013. available from <https://curie.ornl.gov/tags/ati-tr-13047>.
- [14] M. J. Zenkovich et al., *Integrated Database Report—1996: U.S. Spent Nuclear Fuel and Radioactive Waste Inventories, Projections, and Characteristic*, Tech. Rep. DOE/RW-0006, Rev. 13, United States Department of Energy, 1997. available from <http://www.nrc.gov/docs/ML1409/ML14093A125.pdf>.
 - [15] M. Gonzalez-Garcia, M. Maltoni, and T. Schwetz, *Updated fit to three neutrino mixing: status of leptonic CP violation*, [arXiv:1409.5439](#).
 - [16] N. R. C. Committee on Technical Bases for Yucca Mountain Standards, *Technical Bases for Yucca Mountain Standards*. National Academy Press, 1995. available from <http://www.nap.edu/catalog/4943/technical-bases-for-yucca-mountain-standards>.
 - [17] P. Alivisatos et al., *KamLAND: A Liquid scintillator anti-neutrino detector at the Kamioka site*, .
 - [18] **JUNO** Collaboration, Z. Djurcic et al., *JUNO Conceptual Design Report*, [arXiv:1508.07166](#).
 - [19] M. Fuller, *Initial single-shell tank system performance assessment for the hanford site*, Tech. Rep. DOE/ORP-2005-01, Rev. 0, United States Nuclear Regulatory Commission, 2005. available from <http://pbadupws.nrc.gov/docs/ML0622/ML062280233.html>.
 - [20] M. L. Rockhold, D. H. Bacon, V. L. Freedman, M. J. Lindber, and R. Clayton, *Numerical modeling of ^{90}Sr and ^{137}Cs transport from a spill in the b-cell of the 324 building, hanford site 300 area*, Tech. Rep. PNNL-21214, Pacific Northwest National Laboratory, 2012. available from <http://www.pnnl.gov/publications/abstracts.asp?report=406635>.
 - [21] H. K. M. Tanaka and H. Watanabe, *^6Li -loaded directionally sensitive anti-neutrino detector for possible geo-neutrinographic imaging applications*, *Sci. Rep.* **4** (2014) 4708.
 - [22] B. R. Safdi and B. Suerfu, *Directional Antineutrino Detection*, *Phys. Rev. Lett.* **114** (2015), no. 7 071802, [[arXiv:1410.8530](#)].
 - [23] V. A. Li et al., *Invited Article: miniTimeCube*, *Rev. Sci. Instrum.* **87** (2016) 021301, [[arXiv:1602.01405](#)].